



www.dkaudio.fr

A552-16 / A252C



Extra flat (vertically) 2 way surround sound speakers

A552-16

It is equipped with two 5" (13cm) low-mid range speakers, a 0.8" motor and a constant directivity horn.

Designed to be placed under projection booths or balconies. Lay horizontally.

Includes wall support and acoustic foam on a metal grid.

A252C

With a reduced size, it is equipped with a 5" (13cm) coaxial speaker and a 5" (13cm) low-mid range speaker.

Designed to be placed under projections booths or balconies. Lay horizontally.

Includes wall support and acoustic foam on a metal grid.



www.dkaudio.fr

A552-16

A252C



TECHNICAL SPECIFICATIONS

Impedance: 16 ohms

Power capacity: 200 Watts AES

Efficiency: 94 dB/1W/1m

Bandwidth: 70Hz to 21kHz

Low frequency speakers: 2 x 5"

High frequency driver: 1"

Directivity: 90° x 60°

Dim. H x W x D: 187 x 500 x 240mm

Weight: 10.1kg



TECHNICAL SPECIFICATIONS

Impedance: 4 ohms

Power capacity: 300 Watts AES

Efficiency: 95 dB/1W/1m

Bandwidth: 70Hz to 21kHz


Full-range frequency coaxial speaker: 1 x 5"

Low-Mid range frequency speaker: 1 x 5"

Directivity: 90° x 90°

Dim. H x W x D: 175 x 370 x 182mm

Weight: 7.55kg

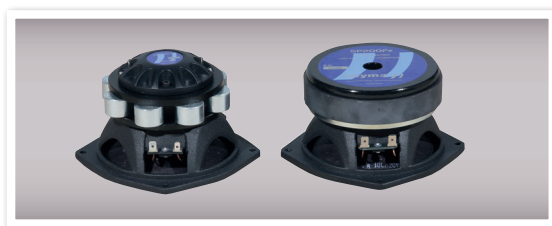

SHAPE DRAWINGS

