



www.dkaudio.fr

3D Immersive Sound - Ceiling



2 way surround cinema coaxial speaker for 3D immersive systems

P15C

The P15C is a surround high-end cinema speaker, designed to reproduce overhead (ceiling) channels within a 3D immersive system. It can eventually be assisted with DKaudio bass reinforcement module.

The P15C is equipped with a low-mid frequencies 15" (38 cm) loudspeaker and a 2" high frequency coaxial driver.

The P15C only requires a single amplification channel and performs with or without additional processor.

The use of a coaxial loudspeaker allows to reduce as much as possible the height of the enclosure and to have a wide circular and homogeneous directivity, near 100°.

The P15C can be assisted with DKaudio extra-thin bass reinforcement modules: R212 (17cm depth) or R18EXP (34 cm depth), R18 or either R218.

Musicality, precision and dynamics are merged with an excellent performance and a wide range of allowable power. This allows P15C to easily reproduce the most sophisticated and constraining sound messages with a studio audio quality.

Its design and ergonomics fits with the immersive 3D audio whitepapers, and thus offers a constant height under ceiling, whatever the vertical inclination.

The top of the loudspeaker, strictly perpendicular to its front, allows the use of a laser pointer for a very accurate orientation.

Orientation pitch: 1.8° vertical and 3° horizontal.

The use of neodymium magnet reduces the speaker weight.

▶ TECHNICAL SPECIFICATIONS


Frequency response ($\pm 3\text{dB}$): **65 Hz - 21 kHz**
 Usable bandwidth (-10dB): **50 Hz - 22 kHz**
 Efficiency (2,83 Vrms @1m): **103 dB**
 AES power capacity: **490 W**
 RMS power capacity: **470 W**
 Advisable amplification: **150 to 1000 W**
 Maximum calculated SPL: **130 dB**
 Peak calculated SPL: **136 dB**
 Impedance: **8 Ω**
 Directivity (-6dB): **95° conical**
 Filtering: **800 Hz passive**

▶ PHYSICAL SPECIFICATIONS

Dimensions HxWxD (mm): **430 x 582 x 430**
 Dimensions with bracket (mm): **450 x 647 x 474**
 Material: **16mm medium wood**
 Finishing: **Black textured paint**
 Connectors: **Universal terminal block**
 Lifting system: **Tiltable bracket**
 Additional anchors: **6 x M8 secure anchor points**
 Front mask: **Black textile (Jersey) on wooden frame**
 Weight: **25.70 Kg (excl. bracket system)**
 Tiltable bracket: **30/10 steel, black satin oven-baked paint**
 Bracket system weight: **9.20 Kg**
 Aluminium Bracket system weight: **3.70 Kg (quotation on request)**

Compatible with DOLBY® ATMOS and Barco® Auro 11.1

SHAPE DRAWINGS

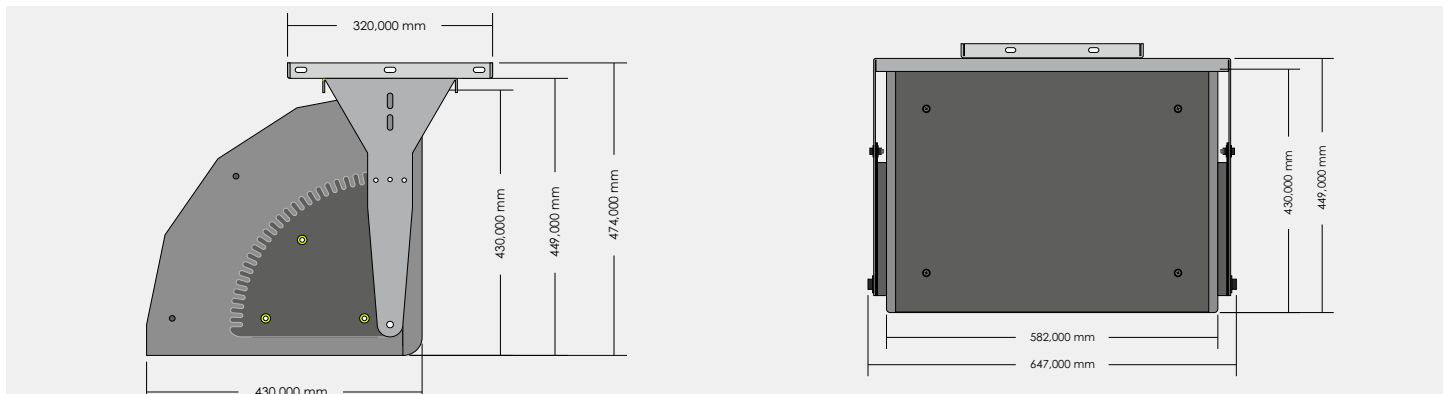

▶ COMPLEMENTS AND ACCESSORIES

R212: **Twin 12" extra thin (17cm) bass reinforcement**
 R18EXP: **18" very thin (34 cm) bass reinforcement**
 R18: **single 18" bass reinforcement**
 R218: **twin 18" bass reinforcement**
 PLP15C: **Rectangular mounting plate for ceiling suspension - Steel**
 LYP15C: **P15C tiltable bracket - Steel**
 LYP15CAL: **P15C tiltable bracket - Aluminium**

▶ ACOUSTIC EQUIPMENT

Low/Mid frequency speaker: **1 x 15" with 4" coil, edge-winding flat aluminium wire, neodymium magnet**
 Mid/High frequency driver: **1 x 2" with 2.87" coil, edge-winding flat aluminium wire, titanium membrane, neodymium magnet**
 Horn: **Low frequency speaker cone**
 Passive filter: **Epoxy printed circuit board, plastic-film capacitors, high-quality iron and air chokes, non-inductive wound resistors**